


NATURAL
AEP
 DN 60 à 300



01/08/2023

ETGRE30STD150

Tés 3E à joint Standard DN60-300

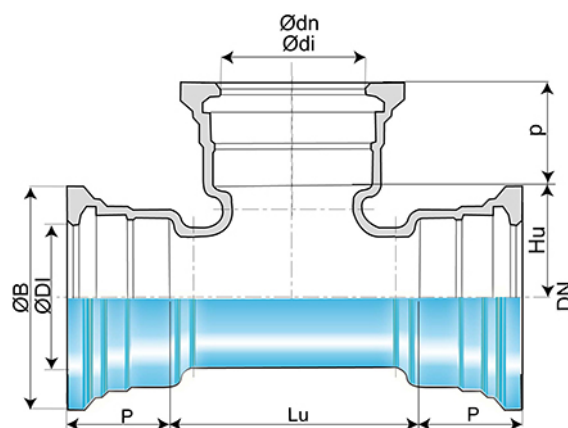

| DN | Ø dn | Lu | P | Ø DI | Ø B | Hu | p | Ø di | Masse | Référence |
|-----|------|-----|-----|-------|-------|-------|-------|-------|-------|--------------|
| mm | mm | mm | mm | mm | mm | mm | mm | mm | kg | |
| 60 | 60 | 154 | 82 | 80.2 | 143.5 | 77.0 | 82.0 | 80.2 | 9.8 | NSA60TE0CNN2 |
| 80 | 60 | 145 | 85 | 101.4 | 167.5 | 85.0 | 82.0 | 80.2 | 11.4 | NSA80TE0CNN2 |
| 80 | 80 | 183 | 85 | 101.4 | 167.5 | 91.5 | 85.0 | 101.4 | 12.8 | NSA80TE0ENN2 |
| 100 | 60 | 150 | 88 | 121.4 | 187.5 | 97.0 | 82.0 | 80.2 | 13.3 | NSB10TE0CNN2 |
| 100 | 80 | 185 | 88 | 121.4 | 187.5 | 103.5 | 85.0 | 101.4 | 14.6 | NSB10TE0ENN2 |
| 100 | 100 | 210 | 88 | 121.4 | 187.5 | 105.0 | 88.0 | 121.4 | 15.9 | NSB10TE0FNN2 |
| 125 | 60 | 150 | 91 | 147.4 | 214.5 | 100.0 | 82.0 | 80.2 | 15.7 | NSB12TE0CNN2 |
| 125 | 80 | 165 | 91 | 147.4 | 214.5 | 121.5 | 85.0 | 101.4 | 17.0 | NSB12TE0ENN2 |
| 125 | 100 | 190 | 91 | 147.4 | 214.5 | 125.0 | 88.0 | 121.4 | 18.4 | NSB12TE0FNN2 |
| 125 | 125 | 267 | 91 | 147.4 | 214.5 | 133.5 | 91.0 | 147.4 | 21.5 | NSB12TE0GNN2 |
| 150 | 60 | 154 | 94 | 173.4 | 241.0 | 112.0 | 82.0 | 80.2 | 18.0 | NSB15TE0CNN2 |
| 150 | 80 | 165 | 94 | 173.4 | 241.0 | 136.5 | 85.0 | 101.4 | 19.3 | NSB15TE0ENN2 |
| 150 | 100 | 190 | 94 | 173.4 | 241.0 | 140.0 | 88.0 | 121.4 | 20.8 | NSB15TE0FNN2 |
| 150 | 125 | 220 | 94 | 173.4 | 241.0 | 143.5 | 91.0 | 147.4 | 22.8 | NSB15TE0GNN2 |
| 150 | 150 | 305 | 94 | 173.4 | 241.0 | 152.5 | 94.0 | 173.4 | 26.5 | NSB15TE0JNN2 |
| 200 | 60 | 159 | 100 | 225.5 | 294.0 | 145.5 | 82.0 | 80.2 | 24.1 | NSB20TE0CNN2 |
| 200 | 80 | 170 | 100 | 225.5 | 294.0 | 166.5 | 85.0 | 101.4 | 25.5 | NSB20TE0ENN2 |
| 200 | 100 | 195 | 100 | 225.5 | 294.0 | 170.0 | 88.0 | 121.4 | 27.3 | NSB20TE0FNN2 |
| 200 | 125 | 220 | 100 | 225.5 | 294.0 | 173.5 | 91.0 | 147.4 | 29.4 | NSB20TE0GNN2 |
| 200 | 150 | 250 | 100 | 225.5 | 294.0 | 177.5 | 94.0 | 173.4 | 31.6 | NSB20TE0JNN2 |
| 200 | 200 | 360 | 100 | 225.5 | 294.0 | 180.0 | 100.0 | 225.5 | 38.8 | NSB20TE0KNN2 |
| 250 | 80 | 234 | 105 | 277.3 | 351.0 | 182.5 | 85.0 | 101.4 | 30.6 | NSB25TE0ENN2 |
| 250 | 100 | 175 | 105 | 277.8 | 351.0 | 245.0 | 88.0 | 122.4 | 32.3 | NSB25TE0FNN2 |
| 250 | 150 | 235 | 105 | 277.8 | 351.0 | 255.0 | 94.0 | 174.4 | 36.9 | NSB25TE0JNN2 |
| 250 | 200 | 290 | 105 | 277.8 | 351.0 | 155.0 | 100.0 | 226.2 | 42.0 | NSB25TE0KNN2 |
| 250 | 250 | 350 | 105 | 277.8 | 351.0 | 165.0 | 105.0 | 277.8 | 49.7 | NSB25TE0LNN2 |
| 300 | 100 | 180 | 110 | 329.8 | 408.3 | 170.0 | 88.0 | 122.4 | 41.0 | NSB30TE0FNN2 |
| 300 | 150 | 235 | 110 | 329.8 | 408.3 | 175.0 | 94.0 | 174.4 | 46.0 | NSB30TE0JNN2 |
| 300 | 200 | 295 | 110 | 329.8 | 408.3 | 180.0 | 100.0 | 226.2 | 52.1 | NSB30TE0KNN2 |

| | | |
|---|---|----------------------|
| NATURAL AEP DN 60 à 300 |  | 01/08/2023 |
| | | ETGRE30STD150 |

| DN | Ø dn | Lu | P | Ø DI | Ø B | Hu | p | Ø di | Masse | Référence |
|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--------------|
| <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>kg</i> | |
| 300 | 250 | 350 | 110 | 329.8 | 408.3 | 185.0 | 105.0 | 277.8 | 60.4 | NSB30TE0LNN2 |
| 300 | 300 | 410 | 110 | 329.8 | 408.3 | 195.0 | 110.0 | 329.8 | 69.0 | NSB30TE0MNN2 |

Domaine d'emploi :

- Pour réseaux d'adduction d'eau potable

Principales caractéristiques :

- Revêtement extérieur-intérieur : Aquacoat Raccords (AQB)
- Conformité à EN 545:2010 et ISO 2531:2009