

E3 Gate valve | Combi valves

Overview

Design features


- Resilient seated gate valve according to EN 1171, EN 1074-1 and EN 1074-2 with smooth, straight-through bore
- Double bayonet O-ring carrier is connecting the spindle to the bonnet, allowing a fully encased, uniform epoxy powder coated bonnet for further improved corrosion protection
- Wedge guide made of wear resistant POM material in load optimized design minimizes attrition and ensures lowest torque actuation
- Wedge is flexible and fully linked in vulcanized elastomer to the wedge nut. This snug fit dampens vibration during opening and closing of the wedge
- Wedge nut has a long thread length allowing significantly higher torques than the standard before breaking
- O-rings, lip-seals mounted in the bonnet are replaceable under operating pressure
- Extended edge protection to avoid damages during transport, storage and assembly
- Sliding disks and ball bearing assure low friction performance of the spindle
- 100% suitable for buried installations

Material | Technical features



- 1,2 Body (1), bonnet (2), centering flange (16) made of ductile iron, epoxy powder coated inside and out
- 3 Wedge made of ductile iron (DN 50 made of dezincification-resistant brass) with vulcanized elastomer all-over
- 4 Wedge guide made of wear-resistant plastic
- 5 Wedge nut made of dezincification-resistant brass
- 6 Duplex stainless steel spindle with rolled thread and flat-rolled anti-friction surface
- 7 O-ring carrier made of brass, DN 50 — 200 with double bayonet
- 8 O-rings made of elastomer
- 9 Wiper ring made of PE
- 10 Bonnet gasket made of elastomer
- 11 Allen screws made of stainless steel, encased into the body with interlacing gasket and sealing compounds, ensuring full corrosion protection
- 12 Extended edge protection made of PE
- 13 Spindle bearing made of dezincification resistant brass
- 14 Sliding disks made of POM
- 15 Safety screw made of stainless steel
- 17 Centering flange gasket made of elastomer
- 18 Axial ball bearing permanently lubricated
- 19 Centering ring made of POM
- 20 Lip seals made of elastomer
- 21 Wiper ring made of elastomer

DN 50 — 200

Spindle bearing with sliding disks

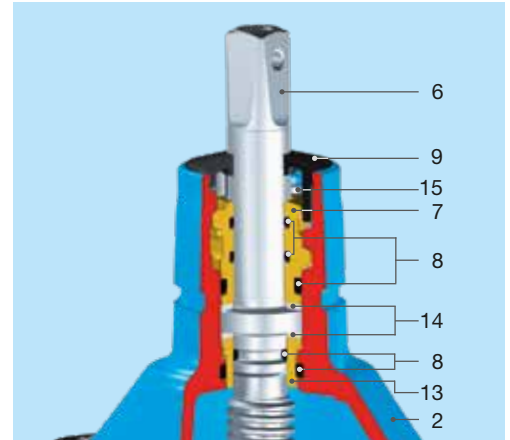

DN 250 — 400 Spindle bearing with ball bearing and additional sliding disks

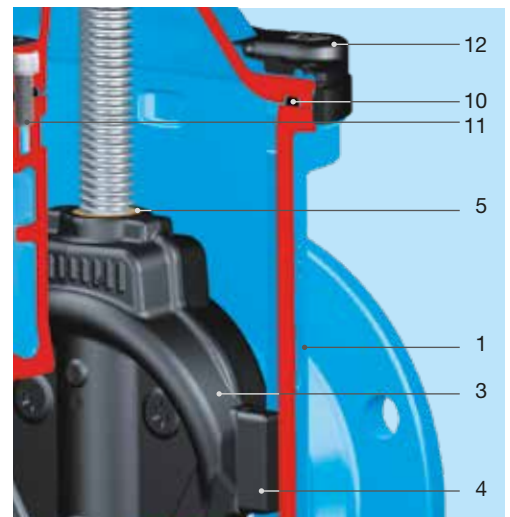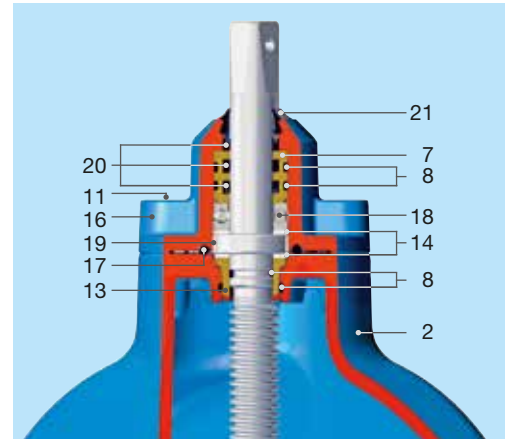

DN 500 — 600 in preparation -
currently available - see page A 11/3

E3 Combi-IV



Flanged T-piece with 4 flanged outlets and 2, 3 or 4 integral E3 valves, PN 10 | PN 16

Design features

- Resilient seated gate valve combined with flange cross piece
- Space saving installation through short design as well as savings in material, work, transport and storage costs
- The compact design enables the valve chamber to be made from sectional concrete giving typical savings of 25 % in chamber construction costs
- Vertical connection DN 100 optional
- Internal thread connection $\frac{3}{4}$ " - optional for manometer, ball valve outlet etc.
- Flanges sized in accordance with EN 1092-2, drilled according EN 1092-2 | PN 10 standard; EN 1092-2 | PN 16 DN 200 please specify on order - other standards on request
- Suitable for cleaning with a cleaning pig
- Duplex stainless steel spindle

No. 4400E3

No. 4410E3



Instead of a bonnet, a cap No. 8570E2/E3 can be fitted onto the body of any outlet not requiring a valve

Suitable accessories

Suitable accessories: see page A 2/2

Handwheel:		No. 7800
Extension spindles:	rigid	No. 9000E2/E3
	telescopic	No. 9500E2/E3
Surface box:	No. 4550	
Operating cap:	No. 2156, No. 2157	
Extension spindle:	No. 7820, No. 7825	
Position indicator:	No. 2170E2/E3	
Bolts:	No. 8810, No. 8830, No. 8840	
Flat gasket:	No. 3390, No. 3470	
Blanking cap:	No. 8570E2/E3	




No. 4410E3 cross connection with 3 valves and vertical centre outlet



With 3 valves and no vertical outlet

Please specify the arrangement of the valves in a clockwise direction!




Order no.	Version	MOP (PN)	No. of valves	Dimensions/DN				
				80	100	125	150	200
4400E3	Without vertical centre outlet	16	2					
			3					
			4					
4410E3	With vertical outlet	16	3					
			4					

E3 Combi-IV


Flanged T-piece with 4 flanged outlets and 2, 3 or 4 integral E3 valves, PN 10 | PN 16

No. 4400E3

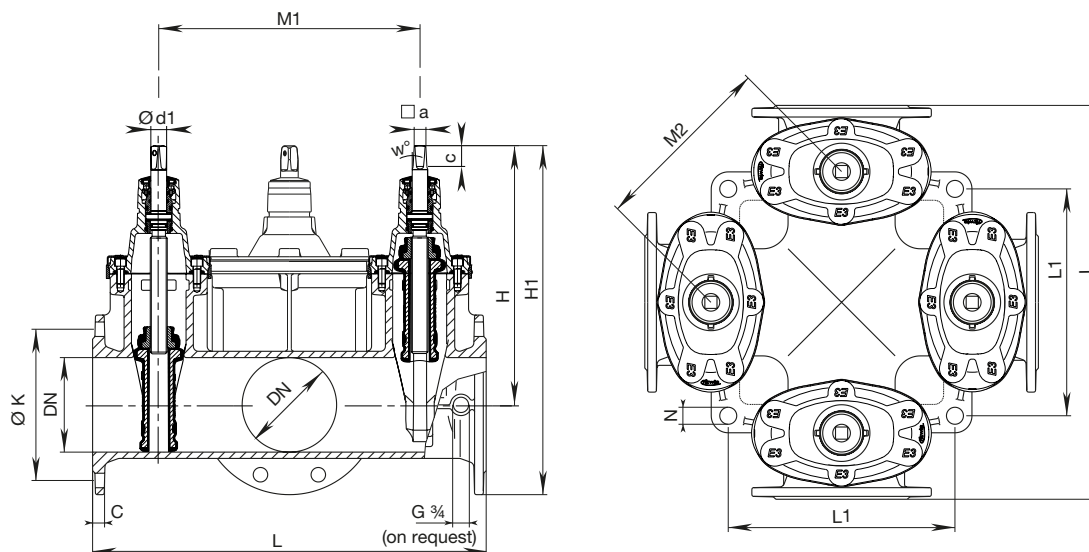

DN	E3 Combi IV without vertical centre outlet									Spindle				Weight (no. of valves)		
	L	H	H1	ØK	C	M1	M2	L1	N	□ a	c	w°	Ød1	2	3	4
80	435	313	413	160	19	255	180			17,3	33,8	3°	24	55,0	60,0	65,0
100	555	343	453	180	19	365	258	212	27	19,3	37,2		24	76,0	84,0	90,0
125	615	421	571	210	19	415	293,5	360	27	19,3	34,9		26	125,0	135,0	139,0
150	625	433	576	240	19	415	293,5	360	27	19,3	34,9		26	135,0	143,0	151,0
200	695	541	711	295	20	465	329	445	32	24,3	48		30	207,0	223,0	238,0

No. 4410E3

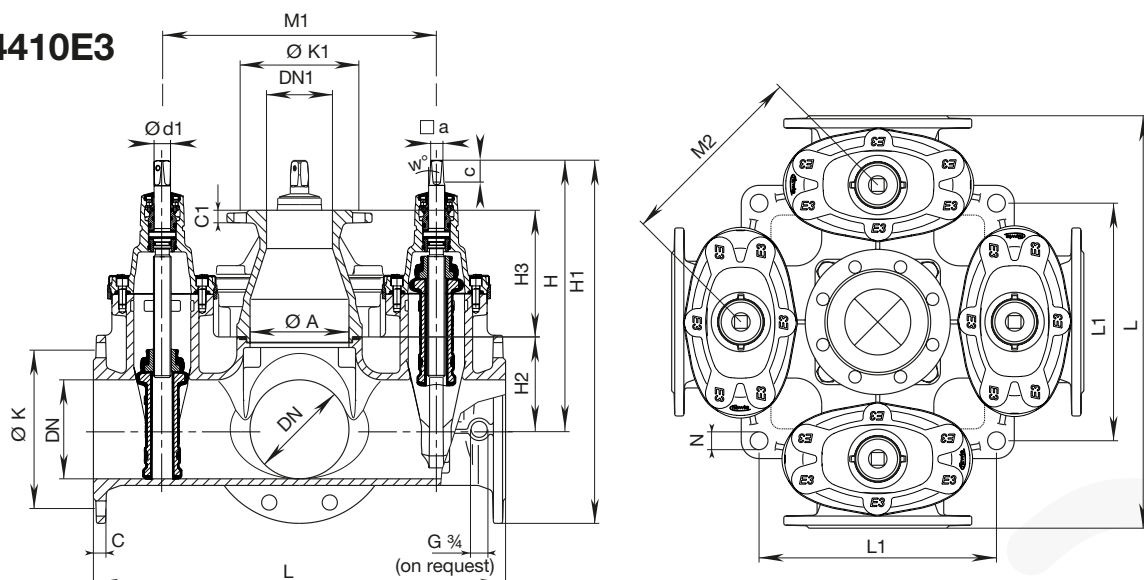

DN	E3 Combi IV with vertical centre outlet															Spindle				Weight (no. of valves)	
	ØA	DN1	L	L1	H	H1	H2	H3	C	C1	ØK	ØK1	M1	M2	N	a	c	w°	Ød1	3	4
100	100	100	555	212	343	453	90	+	19	+	180	+	365	258	27	19,3	37,2		24	90,0	96,0
150	150	100	625	360	433	576	140	192	19	19	240	180	415	293,5	27	19,3	34,9	3°	26	154,0	164,0
200	200	100	695	445	541	711	180	192	20	19	295	180	465	329	32	24,3	48		30		265,0

+ flange connection directly on the body - stud